




Loop 2

Loop 1

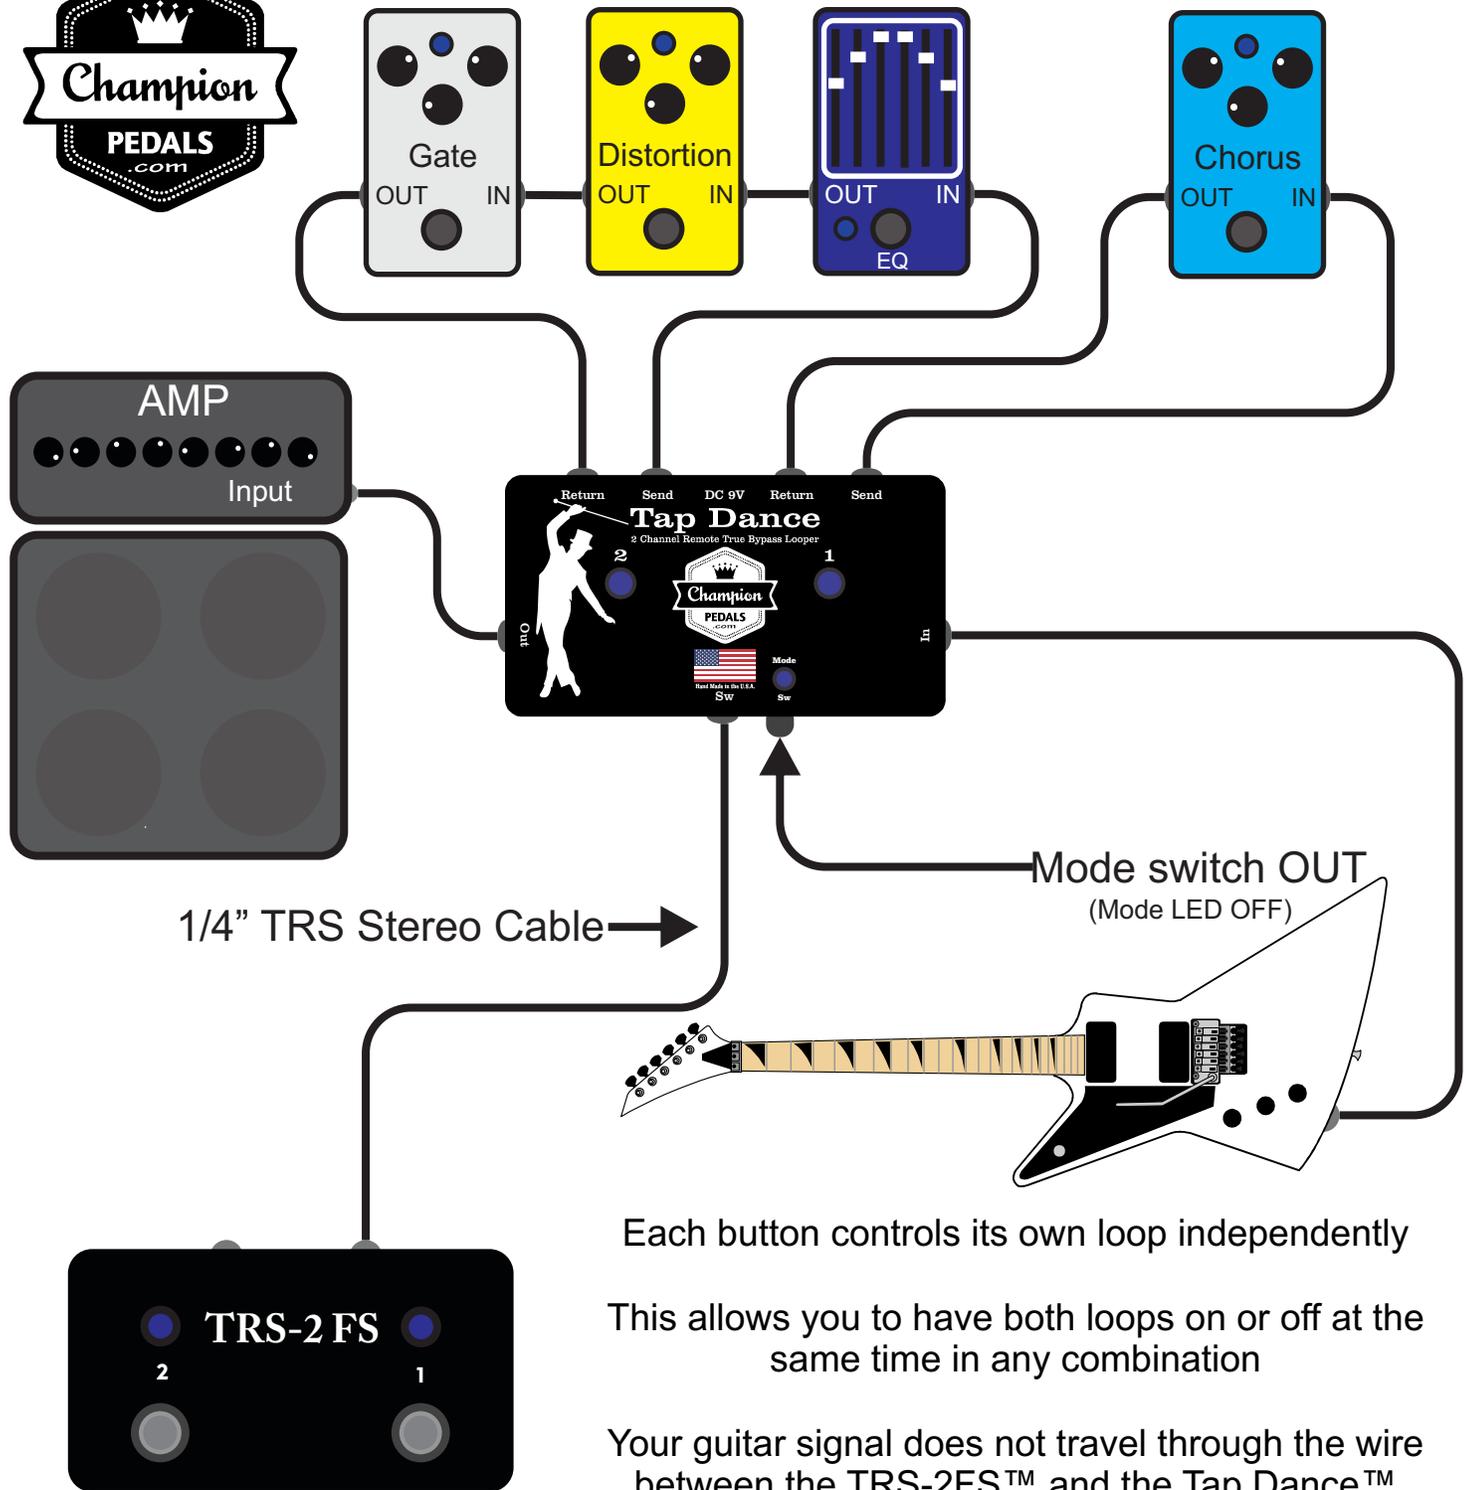


Discrete Mode

- Each button controls its own loop independently
- This allows you to have both loops on or off at the same time in any combination
- Your guitar signal does not travel through the wire between the TRS-2FS™ and the Tap Dance™
- This allows you to use any length wire you like without signal degradation



Loop 2

Loop 1

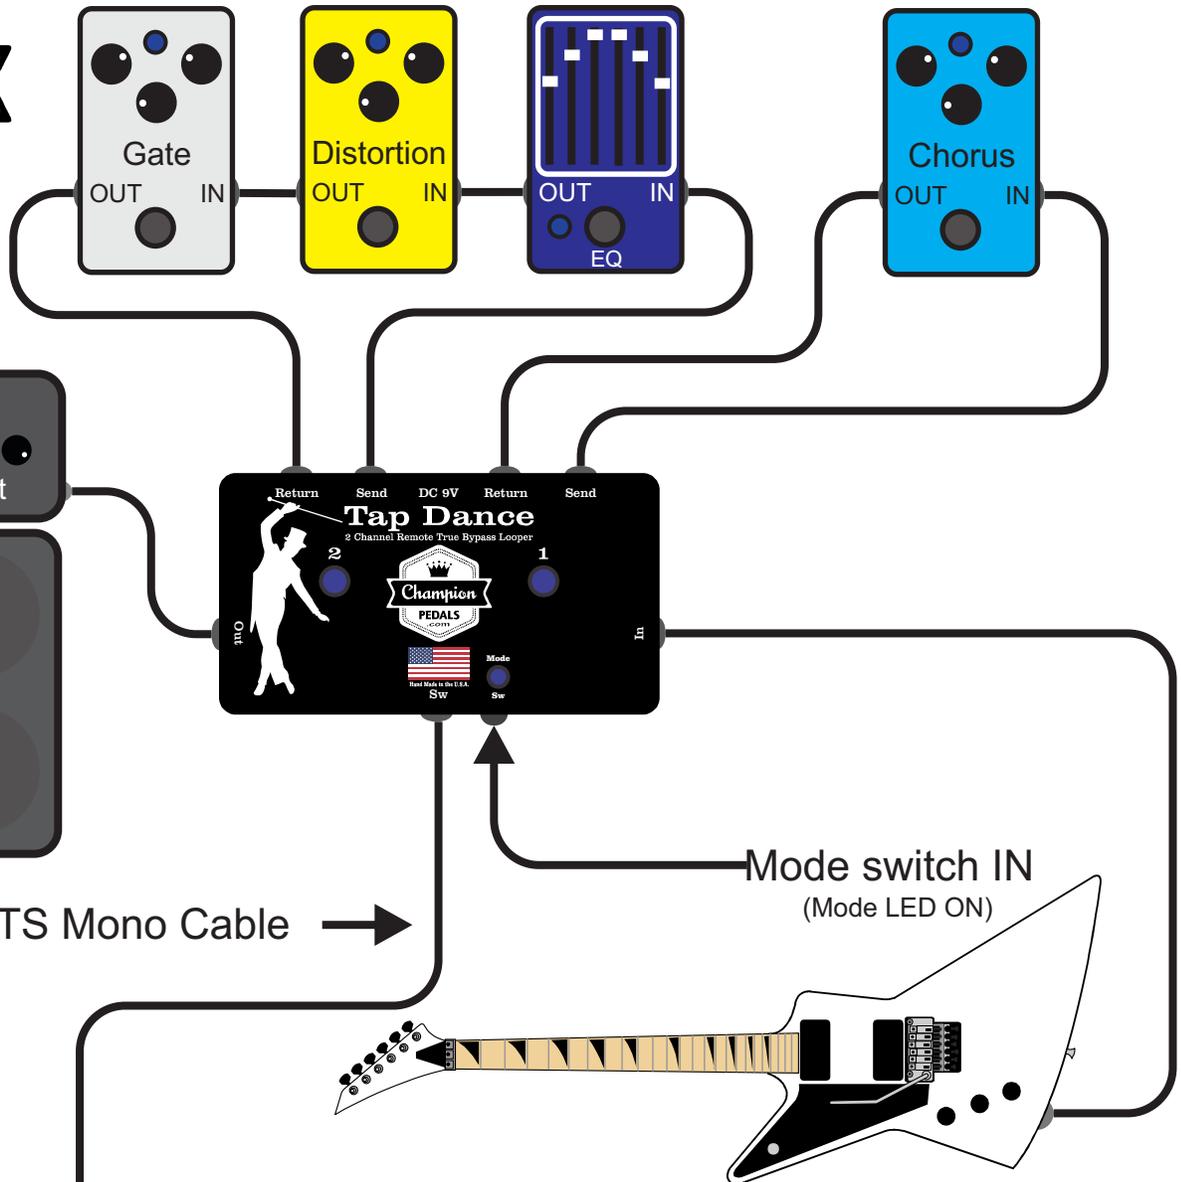

1/4" TS Mono Cable →

Mode switch IN
(Mode LED ON)

Button 1 toggles between loop 1 and 2

Button 2 does not function in this setup and only a mono cable is required for "Toggle" mode




Loop LEDs off=Loop 1 active,
Loop 2 LED on= Loop 2 active

Toggle Mode



Loop 2

Loop 1

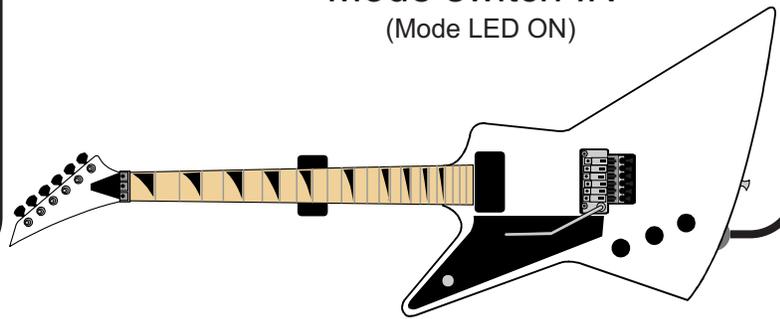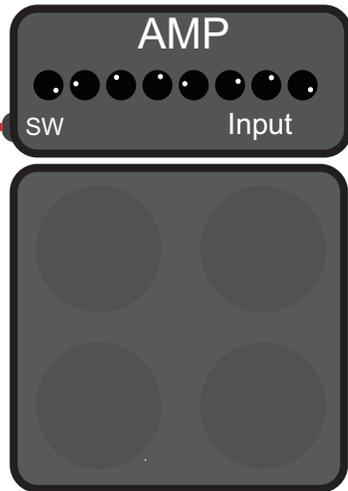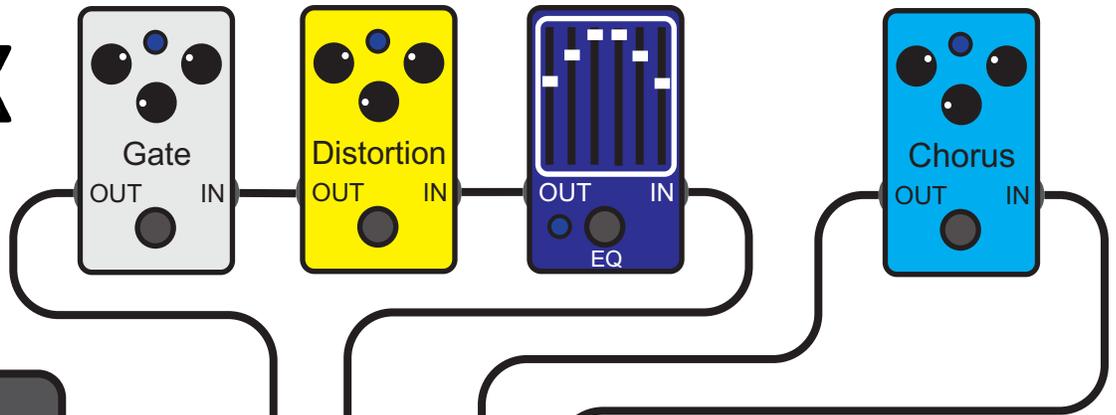

1/4" TS Mono Cable →

← 1/4" TS Mono Cable or 1/4" TRS Stereo Cable depending on amp



The switching jacks in the TRS-2 FS are completely isolated so there will be no ground issues

Toggle Mode with amp control

Button 1 toggles between Amp channel 1 and 2 as well as loop 1 and 2

Button 2 does not affect the Tap Dance™ in this setup but on many amps you can control an extra function

Loop LEDs off=Loop 1 active, Amp Channel 1
Loop 2 LED on= Loop 2 active Amp Channel 2
Some amps have the channels inverted